


DEHUI

Max

DH-M772W 430-450W

Half-cut Mono PERC Module

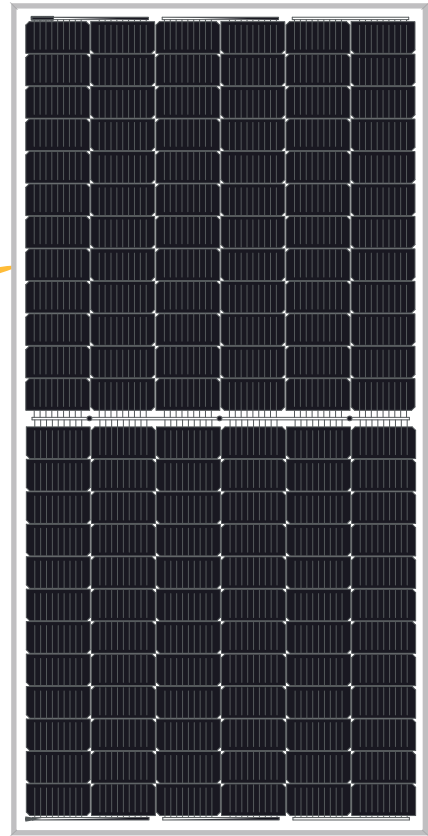

Advanced processing techniques realize great module efficiency to a maximum of 20.7%, steady power output guaranteed



0~+5W Positive tolerance delivers higher output reliability



Excellent performance even under low-light settings, such as dawn, dusk and cloudy day

PID

Advanced cell technology and qualified materials lead to high resistance to PID




Excellent mechanical load resistance: wind loads (2400Pa) & snow loads (5400Pa)



Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

LINEAR PERFORMANCE WARRANTY

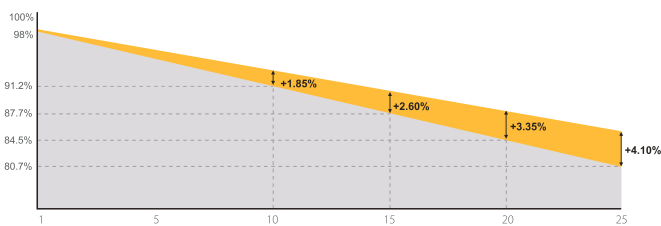

Standard Module Performance Warranty
Dehui Solar Mono Module Linear Performance Warranty

Product Material & Workmanship

12 YEAR WARRANTY

Linear Performance

25 YEAR WARRANTY



LISTED

[PHOTOVOLTAIC MODULE OVER 600 VOLTS]
UL File No. E515622



DH-M772W 430-450W

Half-cut Mono PERC Module

ELECTRICAL PROPERTIES STC*	DH-M772W 430W	DH-M772W 435W	DH-M772W 440W	DH-M772W 445W	DH-M772W 450W
Peak Power (Pmax W)	430	435	440	445	450
MPP Voltage (Vmp V)	40.7	40.9	41.1	41.3	41.5
MPP Current (Imp A)	10.57	10.64	10.71	10.78	10.85
Open Circuit Voltage (Voc V)	48.5	48.7	48.9	49.1	49.3
Short Circuit Current (Isc A)	11.31	11.39	11.46	11.53	11.60
Module Efficiency (%)	19.8	20.0	20.2	20.5	20.7
Power Tolerance	0~+5W				
Operating Temperature	-40°C ~ 85°C				
Maximum System Voltage	DC 1500V				
Maximum Series Fuse Rating	20A				
Fire Safety	Class C				

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5

ELECTRICAL PROPERTIES NOCT*	DH-M772W 430W	DH-M772W 435W	DH-M772W 440W	DH-M772W 445W	DH-M772W 450W
Peak Power (Pmax W)	318.5	322.2	326.0	329.7	333.4
MPP Voltage (Vmp V)	37.6	37.8	38.0	38.1	38.3
MPP Current (Imp A)	8.47	8.53	8.59	8.64	8.70
Open Circuit Voltage (Voc V)	45.3	45.5	45.6	45.8	46.0
Short Circuit Current (Isc A)	9.12	9.18	9.24	9.30	9.36

*NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

MECHANICAL PROPERTIES	
Cell Type	Mono Cell (166x83mm)
Number of Cells	6X24 (144pcs)
Dimension	2094x1038x35mm(82.4x40.8x1.38inches)
Weight	24.0kg(52.9lb)
Front Glass	3.2mm
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 Diodes
Cable Type	4.0 mm ²
UL Fire Type	1
Length of Cable	300mm, length can be customized

TEMPERATURE COEFFICIENT	
Temp. Coeff. Of Pmax (TK Pmax)	-0.370%/°C
Temp. Coeff. Of Voc (TK Voc)	-0.286%/°C
Temp. Coeff. Of Isc (TK Isc)	+0.057%/°C

PACKAGING	
Pallet	30pcs
20'GP	150pcs
40'HC	660pcs

The specifications and key features contained in this datasheet maybe changed, modified or updated at any time under sole discretion of Dehui, without further notice to the user, due to the on-going research and development efforts and continuous product improvement processes employed at the factory. Therefore, Dehui reserves the right to make any adjustment to the information contained herein. It is the responsibility of the user of datasheet to obtain the latest, current revision - matching to the correct Dehui product - that the user has purchased or intends to purchase.

